

Cuppone, Model Evolution Deck Oven Performance Test

Application of ASTM Standard Test Method F 1965-99

FSTC Report 5011.09.14

December 2009

Prepared by:

Adam Spitz
Food Service Technology Center
San Ramon, California

Contributors:

David Zabrowski
Greg Sorensen
Fisher Nickel Inc.
San Ramon, California

Prepared for:

Pacific Gas & Electric Company
Customer Energy Efficiency Programs
PO Box 770000
San Francisco, California 94177

© 2009 by Fisher-Nickel, inc. All rights reserved.

The information in this report is based on data generated at the Food Service Technology Center.

Policy on the Use of Food Service Technology Center Test Results and Other Related Information

- Fisher-Nickel, inc. and the Food Service Technology Center (FSTC) do not endorse particular products or services from any specific manufacturer or service provider.
- The FSTC is *strongly* committed to testing food service equipment using the best available scientific techniques and instrumentation.
- The FSTC is neutral as to fuel and energy source. It does not, in any way, encourage or promote the use of any fuel or energy source nor does it endorse any of the equipment tested at the FSTC.
- FSTC test results are made available to the general public through technical research reports and publications and are protected under U.S. and international copyright laws.
- In the event that FSTC data are to be reported, quoted, or referred to in any way in publications, papers, brochures, advertising, or any other publicly available documents, the rules of copyright must be strictly followed, including written permission from Fisher-Nickel, inc. *in advance* and proper attribution to Fisher-Nickel, inc. and the Food Service Technology Center. In any such publication, sufficient text must be excerpted or quoted so as to give full and fair representation of findings as reported in the original documentation from FSTC.

Legal Notice

This report was prepared as a result of work sponsored by the California Public Utilities Commission (Commission). It does not necessarily represent the views of the Commission, its employees, or the State of California. The Commission, the State of California, its employees, contractors, and subcontractors make no warranty, express or implied, and assume no legal liability for the information in this report; nor does any party represent that the use of this information will not infringe upon privately owned rights. This report has not been approved or disapproved by the Commission nor has the Commission passed upon the accuracy or adequacy of the information in this report.

Table of Contents

	Page
Executive Summary	iii
1 Introduction	1-1
Background	1-1
Objective	1-1
Appliance Description.....	1-2
2 Methods	2-1
Setup and Instrumentation	2-1
Energy Input Rate and Thermostat Calibration	2-1
Preheat and Idle Rate Tests.....	2-1
Cooking Energy Efficiency and Production Capacity.....	2-1
Heavy-Load Pizza Tests	2-2
Light-Load Pizza Tests.....	2-2
3 Results	3-1
Preheat and Idle Rate Tests.....	3-1
Uniformity.....	3-3
Cooking Tests	3-3
4 Conclusions	4-1
5 References / Bibliography	5-1
Appendix A: Glossary	
Appendix B: Appliance Specifications	
Appendix C: Results Reporting Sheets	
Appendix D: Cooking-Energy Efficiency Data	

Table of Contents

Figures

		Page
1-1	Cuppone Evolution Deck oven	1-3
3-1	Preheat Characteristics	3-1
3-2	Deck oven disk uniformity temperature graph.....	3-3
3-3	Deck oven heavy load test.....	3-5
3-4	Deck oven part-load cooking energy efficiency	3-6
3-5	Deck oven electric cooking energy consumption profile.....	3-7

Tables

		Page
ES-1	Summary of Performance	IV
1-1	Appliance Specifications	1-3
3-1	Input, Preheat, and Idle Rate Test Results	3-2
3-2	Cooking-Energy Efficiency & Production Capacity Test Results	3-6
D-1	Physical Properties.....	D-1
D-2	Light Load Pizza Efficiency Test Data (80:10).....	D-2
D-3	Heavy Load Pizza Efficiency Test Data (80:10)	D-3
D-4	Heavy Load Pizza Efficiency Test Data (100:100)	D-4
D-5	Cooking-Energy Efficiency and Production Capacity Statistics...	D-5

Executive Summary



The Cuppone Evolution electric deck oven is a stackable unit capable of personalized cooking. The oven's internal cavity is of pentagonal shape equipped with a stone deck and programmable thermostat. The oven's electric heating elements are located both below the stone and near the ceiling of the cooking compartment. The oven is rated at 11.7 kW per deck.

The Cuppone Evolution deck oven, model EV2, was tested at the Food Service Technology Center Laboratory located in San Ramon, California. The objective of this testing was to examine the operation and performance of the Cuppone electric deck oven, model Evolution, under controlled conditions. The oven was tested during idle and cooking conditions, using the American Society for Testing Materials (ASTM) Standard F1965-99 *Standard Test Method for the Performance of Deck Ovens*. Oven performance is characterized by preheat energy consumption and duration, idle energy rate, cooking-energy efficiency and production capacity.

The ASTM test method specifies a 475°F cavity temperature for all tests. Due to the versatility of the Evolution's thermostat controls, the oven underwent multiple testing arrangements regarding ceiling-to-deck heating element ratios, and upper and lower cavity configurations. However, for cooking pizza, Cuppone recommends the ceiling heating elements be set to 80% capacity and the deck to be set to 10% capacity (80:10). For all testing, the temperature sensor installed in the center of the cooking chamber by lab technicians indicated a stabilized operating temperature of 475°F. Since the objective of the preheat test is to determine the time and energy required to reach a ready-to-cook condition, the oven was considered preheated when the cavity temperature reached 97.9% of its stabilized operating temperature (or 465°F). With only the upper cavity activated, this temperature was satisfied in 37.17 minutes consuming 3.60 kWh. With only the lower cavity activated, this temperature was satisfied in 36.75 minutes consuming 3.54 kWh. All testing was subsequently performed with the oven's operational setting at 475°F. The oven was placed under a 10-foot by 5-foot wall-

Executive Summary

mounted canopy hood. The hood was 78 inches above the floor, centered left-to-right over the oven, with a 9-inch front overhang.

Cooking-energy efficiency and production capacity results were obtained from cooking 12" cheese test pizzas under heavy load testing scenarios in the upper cavity with the lower cavity in the off position. The Evolution displayed a production capacity of 75 pizzas per hour per deck. The test setup is shown in Figure ES-1 and the test data is summarized in Table ES-1.

Table ES-1. Summary of Performance: Cuppone Evolution Deck Oven.

Rated Energy Input Rate (kW)	11.7
Measured Energy Input Rate (kW)	11.2
Preheat and Idle Rate Tests (Upper Cavity)	
Preheat Time (minutes)	37.17
Preheat Electric Energy (kWh)	3.60
Idle Energy Rate (kW)	1.28
Preheat and Idle Rate Tests (Lower Cavity)	
Preheat Time (minutes)	36.75
Preheat Electric Energy (kWh)	3.54
Idle Energy Rate (kW)	1.20
Idle Rate Tests (Dual Cavity)	
Upper Cavity Idle Rate (kW)	0.77
Lower Cavity Idle Rate (kW)	0.98
12-inch Pizza (Heavy Load) Cooking Tests (Upper Cavity)	
Electric Cooking Energy Rate (kW)	4.91
Energy Efficiency (%)	75.0 ± 2.8
Production Capacity (Pizzas/H)	75.0 ± 4.3

The oven's heating element system was equipped to operate at various combinations and still maintain a pre-set temperature (475°F). Researchers increased the oven controls to achieve a (100:100) heating element ratio only to find that the increase in energy consumption only slightly improved the cook time, thus resulting in a less-efficient operating procedure. When tested

Executive Summary

with the manufacturer recommended (80:10) ratio, the oven exhibited a 75.0% cooking efficiency. Researchers noted that this may not have fully represented the oven's maximum performance. When researchers tested the oven with the (100:100) ratio, the oven's cooking efficiency reduced to 52.5%.

1 Introduction

Background

Dedicated to the advancement of the food service industry, the Food Service Technology Center (FSTC) has focused on the development of standard test methods for commercial food service equipment since 1987. The test methods, approved and ratified by the American Society for Testing and Materials (ASTM), allow benchmarking of equipment such that users can make meaningful comparisons among available equipment choices. ASTM F1965, *Standard Test Method for the Performance of Deck Ovens*, was originally approved by ASTM in 1999.¹

The primary component of the FSTC is a 10,000 square-foot appliance laboratory equipped with energy monitoring and data acquisition hardware, 60 linear feet of canopy exhaust hoods integrated with utility distribution systems, appliance setup and storage areas, and a state-of-the-art demonstration and training facility.

Controlled testing of the Cuppone Evolution deck oven was performed according to the ASTM deck oven test method. The test data provides key information to determine the cost of operation and the percentage of total kitchen productivity a single appliance can deliver. Better-informed decisions can then be made for equipment purchases, kitchen layout, energy demand of the kitchen, and appliance capacity during peak demand. Improved kitchen strategies can be implemented using the test information to reduce energy costs while still maintaining optimal cooking production. Information about preheat time can be used to schedule start up of an appliance when it is needed, which can reduce the amount of appliance idle time.

Other Food Service Technology Center reports document results of applying the ASTM test method for deck ovens to different models.^{2,3} The glossary in Appendix A provides a quick reference to the terms used in this report.

Objective

The objective of this report is to examine the operation and performance of the Cuppone electric deck oven, model Evolution, under the controlled con-

Introduction

ditions of the ASTM Standard Test Methods. The scope of this testing is as follows:

- Energy input rate is determined to confirm that the oven is operating within 5% of the nameplate energy input rate.
- The amount of time and energy required to preheat the oven to a ready-to-bake state are determined.
- Idle energy rate is measured with the oven maintaining a ready-to-bake state while not baking.
- Evaluate the energy-saving idle modes.
- Cooking-energy efficiency and production rate are determined during heavy load cooking tests using standard cheese pizza as the food product.
- The maximum production capacity of the appliance is determined during heavy load cook testing.

Appliance Description

The Cuppone Evolution is an electric deck oven with a unique electronic temperature control system allowing the operator to manage the cooking-phase of the food product. The electric heating elements on the deck of the oven are covered by stone and successions of electric heating elements are arranged just below the ceiling of the oven, as to simultaneously transmit heat to the top and bottom of the food product. The oven contains 4 electronically adjustable vents on the side of the oven for cooking steam-exhaust.

The Evolution has a maximum electric input rate of 11.7 kW and may be stacked up to two decks high. Appliance specifications are listed in Table 1-1, and the manufacturer's literature is included in Appendix B.

Introduction



Figure 1-1. The Cuppone Evolution deck oven.

Table 1-1. Appliance Specifications.

Manufacturer	Cuppone
Model	Evolution
Generic Appliance Type	Deck Oven
Rated Input	11.7 kW per deck
Technology	Heat Regeneration System
Construction	Stainless Steel Exterior
Controls	Digital
Dimensions	780 x 1630 x 1630 x 780 x 1200 x 450 (mm)

2 Methods

Setup and Instrumentation

The Evolution deck oven was installed in accordance with the ASTM *Standard Test Method for Deck Ovens*.¹ The oven was positioned under a 10-foot by 5-foot wall mounted canopy hood, with the lower edge of the hood mounted at 78 inches above the floor. The exhaust ventilation operated at a nominal rate of 3,000 CFM, or 300 CFM per linear foot of hood.

Power and energy were measured with a watt/watt-hour transducer. Temperature measurement of the cooked pizzas as well as measurement of the oven cavity temperature was accomplished using a data acquisition system that recorded data at 5-second intervals.

Energy Input Rate and Thermostat Calibration

The maximum energy input rate was measured while the oven was preheating from room temperature to a set point of 475°F. Thermostat calibration was verified by installing a thermocouple in the center of the baking chamber, two inches above the deck. The oven was stabilized at the 475°F set point for one hour, and then the temperature was monitored for an additional hour to verify that the average temperature was $475 \pm 5^\circ\text{F}$.

The energy input rate was measured to ensure that the oven was operating according to the manufacturer's specification during testing. The peak input rate was measured at 11.2 kW, 4.3% lower than the rated maximum input rate of 11.7kW.

Preheat Energy Consumption and Idle Energy Rate

The preheat test recorded the time and energy required for the oven to warm from room temperature to a ready-to-cook condition. The oven was considered ready-to-cook when the cavity reached 465°F. After the oven was preheated, it was allowed to stabilize for one hour, and then the idle energy consumption was monitored for a two hour period.

Methods

Cooking-Energy Efficiency and Production Capacity

The heavy-load cooking tests were conducted with the oven operating under full-load conditions with the heating elements set at a (80:10) ratio. Due to the polygonal shape of the oven, the loading sequence was slightly modified to maximize the number of 12-inch pizzas for each test.

Heavy-Load Pizza Tests

The pizzas consisted of 12-inch diameter, par-baked crusts, a simple, tomato-based sauce and part-skim, low moisture, shredded mozzarella cheese. The pizzas were refrigerated overnight to ensure a temperature of $39 \pm 1^\circ\text{F}$.

After the oven was preheated and stabilized at 475°F for one hour, the cook time was adjusted until a final average pizza temperature of $195 \pm 3^\circ\text{F}$ was obtained.

The pizzas were removed from the refrigerator and weighed just before loading. Upon removing the pizzas from the oven, the final pizza temperature was measured with a six-probe thermocouple rig and then placed on a scale to determine the final cooked weight.

Upon completion of the three test-runs under said conditions, an additional three test-runs were conducted following the same procedure, with the heating element control settings were set to a maximum (e.g., 100:100 ratio).

Light-Load Pizza Tests

Light-load pizza tests are used to calculate cooking-energy efficiency under intermittent loading conditions, such as off-peak hours. The pizzas used for the light load test had the same ingredients and composition as the heavy load test.

All cooking tests were performed in triplicate, minimum, to ensure that the reported cooking-energy efficiency and production capacity results had an uncertainty of less than 10%. The results from each test run were averaged, and the absolute uncertainty was calculated based on the standard deviation of the results. Appendix C contains the ASTM results reporting sheets for this oven.

3 Results

Preheat and Idle Rate

When independently preheating from room temperature at (80:10), the upper deck reached 465°F after 37.17 minutes while the oven consumed 3.60 kWh. When independently preheating from room temperature at (80:10), the lower deck reached 465°F after 36.75 minutes while the oven consumed 3.54 kWh. The oven's preheat curve is shown in Figure 3-1.

The oven was stabilized for one hour following the preheat test and then the energy consumption was monitored over a 2-hour period. The upper deck idle energy rate was 1.28 kW. The lower deck idle energy rate was 1.20 kW. During the simultaneous idle test with both decks operating at 475°F, the upper deck had an idle rate of 0.77 kW while the lower yielded a rate of 0.98 kW. The rated energy input, preheat energy, and idle rate test results are summarized in Table 3-1.

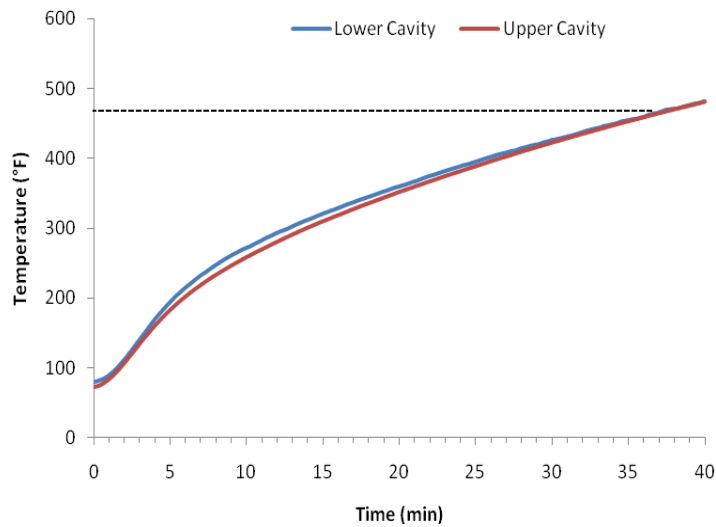


Figure 3-1. Preheat characteristics.

Results

Table 3-1. Input, Preheat, and Idle Rate Test Results at (80:10).

Rated Energy Input Rate (kW)	11.7
Measured Energy Input Rate (kW)	11.2
Preheat and Idle Rate Tests (Upper Deck)	
Preheat Time (minutes)	37.17
Preheat Electric Energy (kWh)	3.60
Idle Energy Rate (kW)	1.28
Preheat and Idle Rate Tests (Lower Deck)	
Preheat Time (minutes)	36.75
Preheat Electric Energy (kWh)	3.54
Idle Energy Rate (kW)	1.20
Idle Rate Tests (Both Decks, kW)	1.75

Results

Uniformity

The uniformity test consisted of 9 steel disks with 6 inch diameters. Each disk had an individual thermocouple tack-welded to the center. The outer five disks were placed on the oven deck, 6 inches from each corner. An inner circle of 4 disks were positioned between each corner disk and placed 12 additional inches in from the outside edges. The final disk was placed directly in the center.

The temperature of each disk is reflected by position in Figure 3-2. Position #1 is the corner closest to the front left of the oven. From there, the positions move clockwise in a spiral formation ending with position #9 in the center.

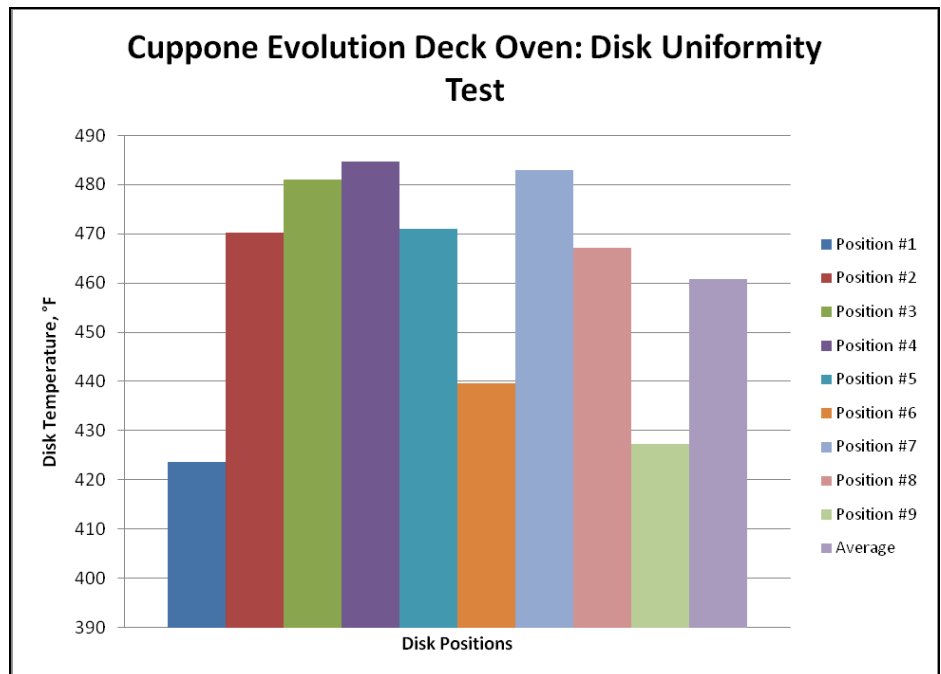


Figure 3-2. Disk Uniformity temperature graph.

Cooking Tests

The ASTM test method specifies 12-inch cheese pizzas as the test product for the cooking energy efficiency tests. Since both decks were equivalent, all cooking tests were conducted on the upper deck with the lower deck cool and turned off. The oven was tested under light (single pizza) and heavy (full

Results

cavity) load conditions. Each load scenario was replicated a minimum of three times to ensure the repeatability of the final test results.

Light-Load Efficiency Tests

Light load tests are used to determine the oven's energy use under low load conditions, as may be reflected during slow periods. Researchers cooked one pizza at a time in the center of upper deck. Using the manufacturer's recommended settings for pizza (80% top heat, 10% bottom heat), the heavy-load tests required 7 minutes and 0 seconds. The light-load energy efficiency was $27.9 \pm 2.6\%$ and the production rate was 7.9 pizzas per hour.

Heavy-Load Efficiency and Production Capacity Tests

The heavy-load tests represent the maximum loading of the oven. Researchers were able to load 11 pizzas at a time into a single deck. Using the manufacturer's recommended settings for pizza (80% top heat, 10% bottom heat), the heavy-load tests required 7 minutes and 0 seconds. The energy efficiency was $75.0 \pm 2.8\%$ and the production capacity was 75.0 pizzas per hour during the heavy-load cooking tests.

To compare the manufacturer's recommended heater settings with a potential "worst case" scenario, the heavy-load tests were repeated with the heaters set to their maximum levels (100% top and bottom heat). With the additional bottom heat, the cook time was reduced to 6 minutes and 0 seconds. The shorter cook time came with a dramatic increase in energy consumption. The energy efficiency was $52.5 \pm 4.3\%$ and the production capacity was 84.6 pizzas per hour.

Results



Figure 3-3. Heavy Load test.

Cooking-energy efficiency is defined as the quantity of energy consumed by the pizzas expressed as a percentage of energy consumed by the oven during the cooking test:

$$\text{Cooking- EnergyEfficiency} = \frac{\text{Energy to Food}}{\text{Energy to Appliance}}$$

The energy transferred to the food was calculated using the measured values of initial and final pizza temperature, initial and final pizza weight, the specific heat of the pizza (based on the specified pizza composition), and the heat of vaporization of water. Energy consumed by the oven is the electric energy consumed during the test. Table 3-2 summarizes the Evolution-2 oven's performance under the ASTM test method. Appendix D contains a synopsis of test data for each replicate of the cooking tests.

Results

Table 3-2. Cooking-Energy Efficiency and Production Capacity Test Results.

	Light Load	Heavy Load (80:10)	Heavy Load (100:100)
Number of pizzas	1	11	11
ASTM Measured Cook Time (mm:ss)	7:00	7:00	6:00
Test Time (minutes)	7.61	8.81	7.85
Electric Cooking Energy Rate (kW)	1.42	4.91	8.31
Energy Efficiency (%)	27.9 ± 2.6	75.0 ± 2.8	52.5 ± 4.3
Production Rate (pizzas/h)	7.9 ± 0.7	75.0 ± 4.3	84.6 ± 9.0
Production Rate (lb/h)	11.3 ± 1.2	109.7 ± 5.3	124.4 ± 13.6

Figure 3-2 illustrates the relationship between cooking-energy efficiency and production rate for the Cuppone Evolution oven when cooking 12-inch pizzas.

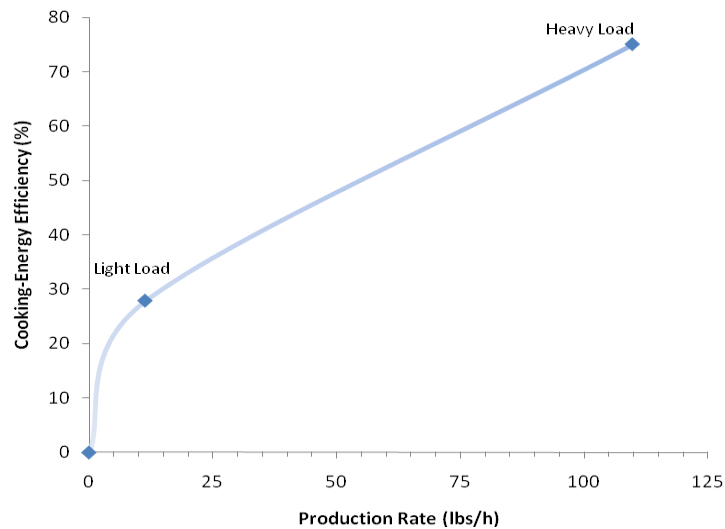


Figure 3-4. Deck oven part load cooking energy efficiency.

Figure 3-3 illustrates the relationship between the oven's average energy consumption rate and the production rate for each deck. This graph can be used as a tool to estimate the daily energy consumption for the deck oven in a real-world operation. Average electric energy consumption rates at 25, 50,

Results

75, and 100 pounds per hour are 1.88 kW, 2.75 kW, 3.63 kW, and 4.53kW, respectively.

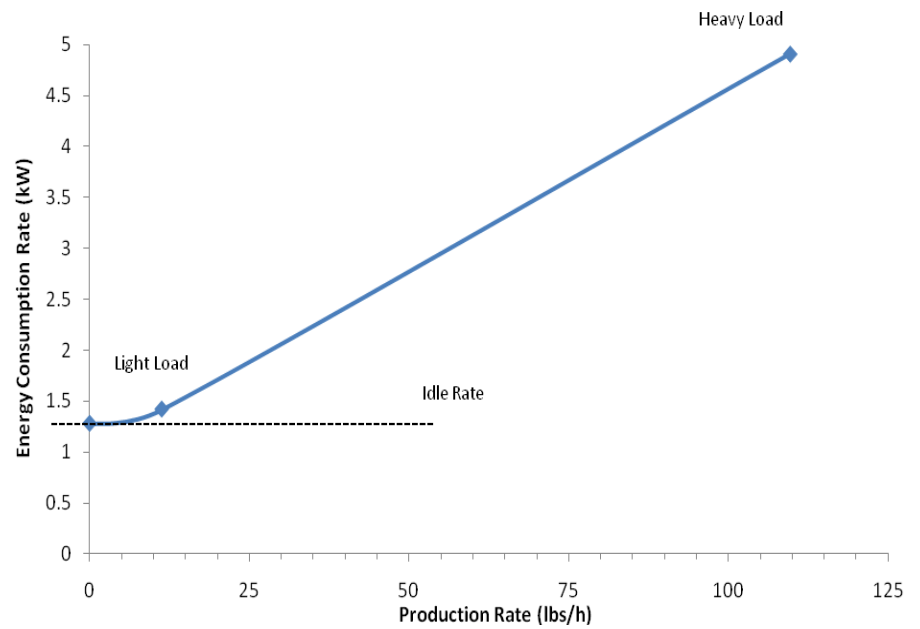


Figure 3-5. Electric cooking-energy consumption profile.

4 Conclusions

The Evolution was able to cook 75 pizzas per hour per deck at the manufacturer's recommended settings while demonstrating a heavy-load cooking-energy efficiency of 75.0%. The double-deck Evolution-2 would have an ASTM production capacity of 150 pizzas per hour, with both decks operating at their maximum capacity.

During testing, the oven exhibited a fairly low duty cycle—that is, the percentage of the oven's actual energy consumption rate compared to the 11.2 kW measured energy input rate—was 11.4% during idle conditions and 43.8% during heavy load cooking operation. This additional reserve heat could be useful for baking denser products, such as deep dish pizzas and casseroles.

The Cuppone Evolution oven presented a challenge to the current version of the ASTM test method. The oven's pentagonal shape made the pizza loading sequence more complex than the ASTM-specified left-to-right, front-to-back sequence.

Based on the experience of applying the ASTM test method, it is recommended that the test method be revised to accommodate alternative deck oven shapes to clarify any potential discrepancies due to the loading patterns.

5 References / Bibliography

1. American Society for Testing and Materials, 2005. *Standard Test Method for Performance of Deck Ovens*. ASTM Designation F1965-99. In Annual Book of ASTM Standards, West Conshohocken, PA.
2. Sorensen, G., Young, R., 1999. *Garland Air Deck™ Model G56PB Deck Oven Performance Test*. Food Service Technology Center Report 5011.99.76, October.

Appendixes

Cook Time (min)

Time required for the deck oven to bring the specified food product to a specified “cooked” condition.

Cooking-Energy Efficiency (%)

The quantity of energy input to the food products; expressed as a percentage of the quantity of energy input to the appliance during the heavy- and light-load tests.

Cooking-Energy (kWh or kBtu)

The total energy consumed by an appliance as it is used to cook a specified food product.

Cooking-Energy Consumption Rate (kW or kBtu/h)

The average rate of energy consumption during the cooking period.

Deck Oven

An appliance that cooks the food product within a heated chamber. The food product can be placed directly on the floor of the chamber during cooking, and energy may be delivered to the food product convective, conductive and/or radiant heat transfer. The chamber may be heated by gas or electric forced convection, radiants, or quartz tubes. Top and bottom heat may be independently controlled.

Duty Cycle (%)

Load Factor

The average energy consumption rate (based on a specified operating period for the appliance) expressed as a percentage of the measured energy input rate.

$$\text{Duty Cycle} = \frac{\text{Average Energy Consumption Rate}}{\text{Measured Energy Input Rate}} \times 100$$

Energy Input Rate (kW or kBtu/h)

Energy Consumption Rate

Energy Rate

The peak rate at which an appliance will consume energy, typically reflected during preheat.

Idle Energy Rate (kW or Btu/h)

Idle Rate

The deck oven’s rate of energy consumption, when empty, required to maintain its cavity temperature at the specified thermostat set point.

Idle Temperature (°F, Setting)

The temperature of the cooking cavity/surface (selected by the appliance operator or specified for a controlled test) that is maintained by the appliance under an idle condition.

Glossary

Idle Duty Cycle (%)

Idle Energy Factor

The idle energy consumption rate expressed as a percentage of the measured energy input rate.

$$\text{Idle Duty Cycle} = \frac{\text{Idle Energy Consumption Rate}}{\text{Measured Energy Input Rate}} \times 100$$

Measured Input Rate (kW or Btu/h)

Measured Energy Input Rate

Measured Peak Energy Input Rate

The maximum or peak rate at which an appliance consumes energy, typically reflected during appliance preheat (i.e., the period of operation when all burners or elements are “on”).

Preheat Energy (kWh or Btu)

Preheat Energy Consumption

The total amount of energy consumed by an appliance during the preheat period.

Preheat Rate (°F/min)

The rate at which the cook zone heats during a preheat.

Preheat Time (minute)

Preheat Period

The time required for an appliance to “pre-heat” from the ambient room temperature ($75 \pm 5^\circ\text{F}$) to a specified (and calibrated) operating temperature or thermostat set point.

Production Capacity (lb/h)

The maximum production rate of an appliance while cooking a specified food product in accordance with the heavy-load cooking test.

Production Rate (pizzas/h)

Productivity

The average rate at which an appliance brings a specified food product to a specified “cooked” condition.

Rated Energy Input Rate

(kW, W or Btu/h, Btu/h)

Input Rating (ANSI definition)

Nameplate Energy Input Rate

Rated Input

The maximum or peak rate at which an appliance consumes energy as rated by the manufacturer and specified on the nameplate.

Test Method

A definitive procedure for the identification, measurement, and evaluation of one or more qualities, characteristics, or properties of a material, product, system, or service that produces a test result.

B Appliance Specifications

Appendix B includes the product literature for the Cuppone, Model Evolution Deck Oven

C Results Reporting Sheets

Manufacturer Cuppone
Model Evolution
Serial Number N/A
Date: August, 2009
Test Reference Number (optional) _____

Section 11.1 Apparatus

 √ Check if testing apparatus conformed to specifications in section 6.

Deviations:

None

Section 11.2 Energy Input Rate


Test Voltage (V)	<u>208</u>
Gas Heating Value (Btu/ft ³)	<u>N/A</u>
Rated (kW)	<u>11.7</u>
Measured (kW)	<u>11.2</u>
Percent Difference between Measured and Rated (%)	<u>4.5</u>
Fan/Control Energy Rate (kW, Gas Ovens Only)	<u>N/A</u>

Results Reporting Sheets

Section 11.3 Preheat Energy and Time

Test Voltage (V)	<u>208</u>
Gas Heating Value (Btu/ft ³)	<u>N/A</u>
Energy Consumption (Btu or kWh)	<u>3.60</u>
Time from <u>72.1</u> °F to 465°F (min)	<u>37.17</u>

Preheat Curve

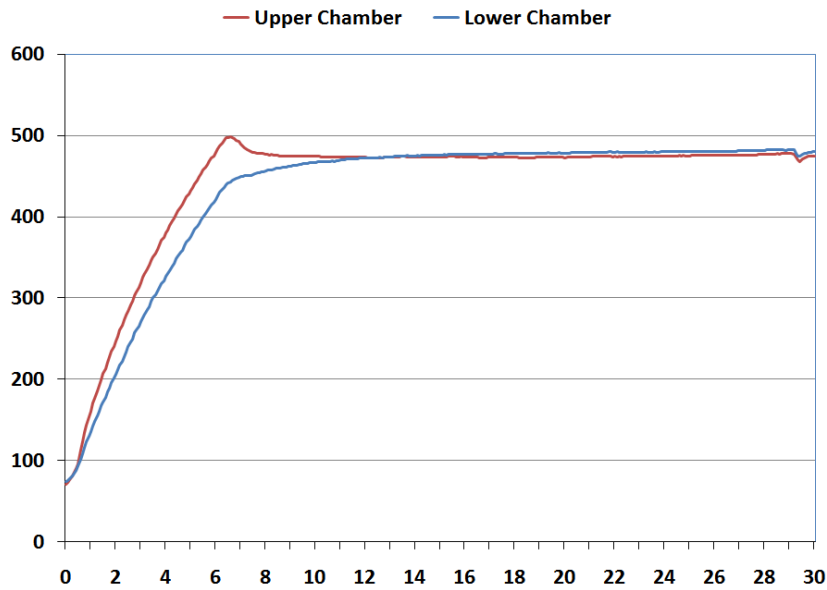

Section 11.4 Idle Energy Rate

Test Test Voltage (V)	<u>208</u>
Gas Heating Value (Btu/ft ³)	<u>N/A</u>
Idle Energy Rate (Btu or kW)	<u>1.28</u>
Electric Energy Rate (kW, gas ovens only)	<u>N/A</u>

Section 11.5 Pilot Energy Rate

Gas Heating Value (Btu/ft ³)	<u>N/A</u>
Pilot Energy Rate (Btu/h)	<u>N/A</u>

Results Reporting Sheets

Section 11.6 Cooking Energy Efficiency and Cooking Energy Rate

Cook Time Determination (80:10):

Cook Time: 7:00 min.

Light Load:

Test Test Voltage (V)	<u>208</u>
Cooking Energy Efficiency (%)	<u>27.90 ± 2.58</u>
Cooking Energy Rate (kW)	<u>1.42</u>
Electric Energy Rate (kW, gas ovens only)	<u>N/A</u>

Heavy Load:

Test Test Voltage (V)	<u>208</u>
Cooking Energy Efficiency (%)	<u>75.03 ± 2.78</u>
Cooking Energy Rate (kW)	<u>4.91</u>
Electric Energy Rate (kW, gas ovens only)	<u>N/A</u>

Cook Time Determination (100:100):

Cook Time: 6:00 min.

Heavy Load:

Test Voltage (V)	<u>208</u>
Cooking Energy Efficiency (%)	<u>52.54 ± 4.27</u>
Cooking Energy Rate (kW)	<u>8.31</u>
Electric Energy Rate (kW, gas ovens only)	<u>N/A</u>

D Cooking-Energy Efficiency Data

Table D-1. Physical Properties.

Specific Heat (Btu/lb °F)	
Pizza	0.59
Latent Heat (Btu/lb)	
Vaporization, Water	970

Cooking-Energy Efficiency Data

Table D-2. Light-Load Pizza Efficiency Test Data at (80:10).

	Repetition #1	Repetition #2	Repetition #3
Measured Values			
Number of Pizzas	1	1	1
Test Voltage (V)	208	208	208
Initial Pizza Temperature (°F)	40.0	40.0	40.0
Final Average Pizza Temperature (°F)	198.0	196.2	196.2
Total Initial Pizza Weight (lb)	1.43	1.42	1.46
Total Final Pizza Weight (lb)	1.38	1.39	1.42
Test Time (min)	7.92	7.42	7.50
Cook Time (min)	7.00	7.00	7.00
Electric Energy to Oven (kWh)	0.18	0.18	0.18
Calculated Values			
Energy Consumed by Pizzas (Btu)	177	165	172
Electric Energy Consumed by Oven (Btu)	437	450	442
Total Energy Consumed by Oven (Btu)	614	614	614
Cooking Energy Efficiency (%)	28.87	26.80	28.05
Electric Cooking Energy Rate (kW)	1.36	1.46	1.44
Production Capacity (lbs/h)	10.80	11.48	11.68
Production Rate (pizzas/h)	7.58	8.09	8.00

Cooking-Energy Efficiency Data

Table D-3. Heavy-Load Pizza Efficiency Test Data (80:10).

	Repetition #1	Repetition #2	Replication #3	Repetition #4
Measured Values				
Number of Pizzas	11	11	11	11
Test Voltage (V)	208	208	208	208
Initial Pizza Temperature (°F)	40.0	40.0	40.0	40.0
Final Average Pizza Temperature (°F)	196.6	196.6	197.6	193.6
Total Initial Pizza Weight (lb)	16.01	16.04	16.15	16.23
Total Final Pizza Weight (lb)	15.53	15.58	15.88	15.99
Test Time (min)	8.67	8.50	8.83	9.25
Cook Time (min)	7.00	7.00	7.00	7.00
Electric Energy to Oven (kWh)	0.66	0.78	0.69	0.66
Calculated Values				
Energy Consumed by Pizzas (Btu)	1,657	1,931	1,772	1,711
Electric Energy Consumed by Oven (Btu)	903	731	583	542
Total Energy Consumed by Oven (Btu)	2,560	2,662	2,355	2,253
Cooking Energy Efficiency (%)	76.45	72.52	75.23	75.93
Electric Cooking Energy Rate (kW)	5.19	5.50	4.69	4.28
Production Capacity (lbs/h)	110.8	113.2	109.7	105.2
Production Rate (pizzas/h)	76.1	77.7	74.8	71.4

Cooking-Energy Efficiency Data

Table D-4. Heavy-Load Pizza Efficiency Test Data (100:100).

	Repetition #1	Repetition #2	Repetition #3	Replication #4	Replication #5
Measured Values					
Number of Pizzas	11	11	11	11	11
Test Voltage (V)	208	208	208	208	208
Initial Pizza Temperature (°F)	40.0	40.0	40.0	40.0	40.0
Final Average Pizza Temperature (°F)	197.9	193.9	192.0	194.3	195.5
Total Initial Pizza Weight (lb)	16.10	16.21	16.22	16.28	16.06
Total Final Pizza Weight (lb)	15.52	15.73	15.80	15.84	15.67
Test Time (min)	9.09	7.17	7.83	7.58	7.58
Cook Time (min)	6.00	6.00	6.00	6.00	6.00
Electric Energy to Oven (kWh)	1.14	1.20	0.96	1.08	1.02
Calculated Values					
Energy Consumed by Pizzas (Btu)	2,070	1,939	1,864	1,911	1,860
Electric Energy Consumed by Oven (Btu)	1,821	2,156	1,413	1,775	1,622
Total Energy Consumed by Oven (Btu)	3,891	4,096	3,277	3,686	3,481
Cooking Energy Efficiency (%)	53.20	47.35	56.88	51.84	53.41
Electric Cooking Energy Rate (kW)	7.52	10.04	7.36	8.55	8.07
Production Capacity (lbs/h)	106.3	135.6	124.3	128.8	127.1
Production Rate (pizzas/h)	72.61	92.05	84.29	87.07	87.07

Cooking-Energy Efficiency Data

Table D-5. Cooking-Energy Efficiency and Production Capacity Statistics (80:10).

	Cooking-Energy-Efficiency		Production Capacity
	Heavy Load	Light Load	(pizzas/h)
Replicate #1	76.5	28.9	76.1
Replicate #2	72.5	26.8	77.7
Replicate #3	75.2	28.1	74.5
Replicate #4	75.9	n/a	71.4
Average	75.0	27.9	75.0
Standard Deviation	1.75	1.04	2.69
Absolute Uncertainty	2.78	2.58	4.27
Percent Uncertainty	3.71	9.25	5.70